

Virtuos BT-310N – POHODA RS-232+CR

Načítejte postupně od shora dolů!



Unpair



Bluetooth Mode



SPP



Sleep time = 2 hours

⌚ čekejte 5 sek. ⌚



Start Configuration((+SETF))




Set All default((+RETF))



End Configuration((+ENDF))

Nastavení v systému POHODA – výběr portu dle správce zařízení

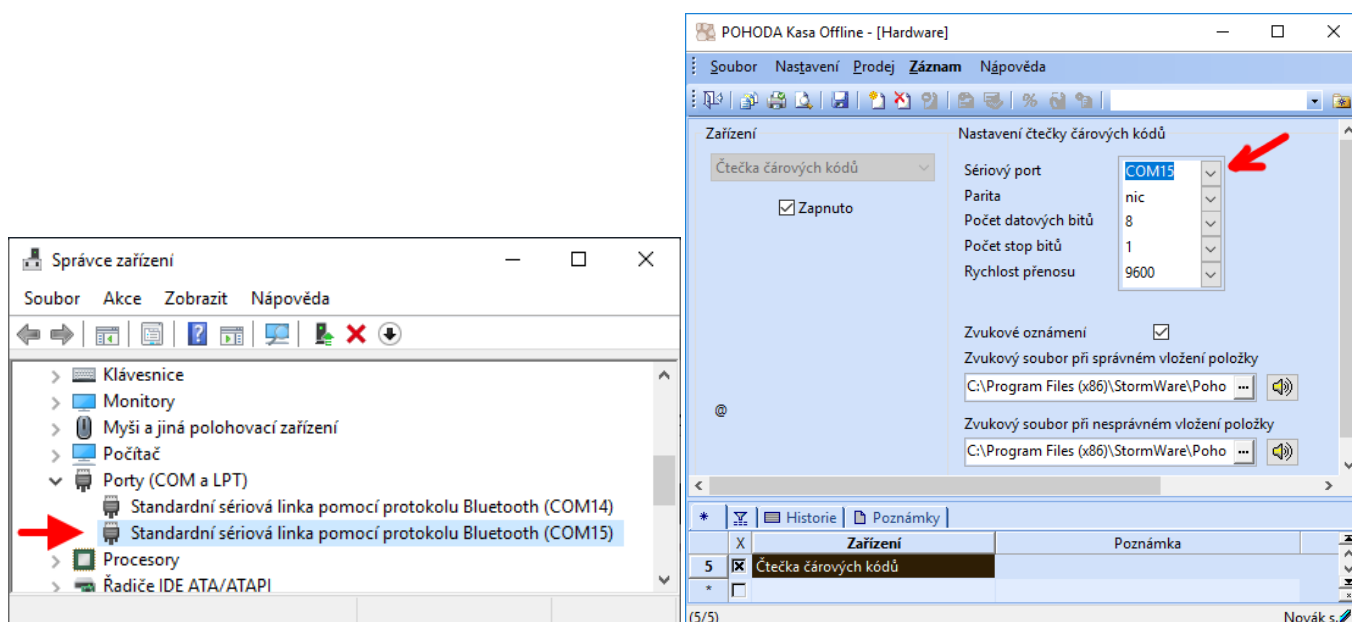

The screenshot shows the POHODA Kasa Offline software interface. The main window is titled 'POHODA Kasa Offline - [Hardware]'. The 'Zařízení' (Devices) tab is selected, showing a list of devices. The 'Čtečka čárových kódů' (Barcode scanner) device is highlighted, and its settings are displayed on the right. The 'Sériový port' (Serial port) is set to 'COM15', indicated by a red arrow. The 'Nastavení čtečky čárových kódů' (Barcode scanner settings) section includes options for 'Parita' (Parity), 'Počet datových bitů' (Number of data bits), 'Počet stop bitů' (Number of stop bits), and 'Rychlost přenosu' (Transfer rate). The 'Zvukové oznámení' (Sound notification) section is also visible, with a checked box for 'Zvukové oznámení' (Sound notification) and two sound file paths.

The 'Správce zařízení' (Device Manager) window is also visible, showing a list of devices. The 'Standardní sériová linka pomocí protokolu Bluetooth (COM15)' device is highlighted, indicated by a red arrow.