



Programming Manual 2D Fixed Mount Barcode Scanner HM-755A



Restore Default



Firmware version

Content

Version No.	5
Default Setting	5
USB Keyboard Layout Control Character Escaping	6
CR/LF character processing(USB Keyboard)	6
USB Keyboard Transfer Speed	7
Convert Case.....	8
Keyboard Layouts.....	8
Virtual Keyboard.....	12
Selection of Host Operating System in Virtual Keyboard Mode	13
Barcode Encoding Configuration	13
Output Encoding Format	14
Invoice Function.....	15
Switch On/Off Invoice Function	15
Invoice Type	15
RS232 Interface Configuration Baud Rate	16
Data bit, Stop bit, Parity bit	17
GS Control Character Replacement.....	19
Control Character Output	20
Scan Mode	20
Auto Sense Mode off.....	20
Auto Sense Mode on	20
Repeat Barcode Detection.....	20
Center Mode	21
Light Configuration LED Indicator Light	22
Buzzer Configuration Volume Setting	22
Scanner Start Prompt Tone Setting	22
Successful Decoding Prompt Tone Setting.....	23
Successful Decoding Prompt Audio Frequency Setting (Tone)	23
Successful Decoding Prompt Duration Setting.....	24
Error Warning Prompt Frequency Setting (Tone)	24
Prefix and Suffix Configuration Start Character.....	25
Terminal Character	25
Custom Prefix	26
Output Options	26
Edit.....	26
Custom Suffix	27
Output Options	27
Edit.....	27
Code ID Output Options	27
Edit.....	28
AIM ID	28
Barcode Prefix and Suffix Order Selection Prefix.....	29
Suffix	29
Data Edition	29
Transmission Configuration	30

Field Length Configuration	30
Inverse color barcode selection (Only 1D/DataMatrix/Aztec)	31
Non-standard Barcode Option	31
Barcode Type Selection Enable/DisableAll barcodes	32
Enable/DisableAll 1D barcodes	32
Enable/DisableAll 2D barcodes	32
DisableAll	33
Codabar Start/Terminal Character	33
Send Codabar Start/Terminal Character	33
Code 39	34
Code 39 Parity Check	34
Code 39 Full ASCII	35
Code 39 Start/Terminal Character	35
Set Length Range for Code 39	35
Code 32(Enable code39 first)	36
Code 32 Prefix	36
Interleaved 2 of 5 (ITF25)	36
Interleaved 2 of 5 (ITF25) Check Bit	37
Interleaved 2 of 5 (ITF25) Length Selection	37
Set Length Range for Interleaved 2 of 5	39
Industrial 2 of 5/IATA	39
Set Length Range for Industrial 2 of 5	39
Matrix 2 of 5 (4-24bit)	40
Set Length Range for Matrix 2 of 5	40
Code 93	40
Set Length Range for Code 93	41
Code 11	41
Code 11 Parity Check Output	41
Code 11 Parity Selection	42
Set Length Range for Code 11	42
Code 128	43
ISBT-128	43
GS1-128	43
Set Length Range for CODE-128	44
UPC-A	44
UPC-A Check Bit	44
UPC-A Leading Digits	45
UPC-E	45
UPC-E Check Bit	45
UPC-E Expand to UPC-A	46
UPC-E Leading Digits	46
EAN-8 Convert to EAN-13	47
EAN-8 Check Bit	47
EAN-13 Check Bit	48

UPC/EAN/JAN Additional Code.....	48
EAN13 Convert to ISBN	49
EAN13 Convert to ISSN	49
GS1 DataBar (RSS14).....	49
GS1 DataBar Limited.....	50
GS1 DataBar Expanded.....	50
GS1 Composite.....	50
MSI	51
MSI Check Bit.....	51
MSI Check Bit Option.....	51
MSI 2 Check Bits Option	52
MSI Code Reading Length Setting	52
Febraban.....	53
Enable/Disable Febraban Code(ITF25).....	53
Enable/Disable Febraban code(Code128)	53
Febraban Check Bit.....	53
PDF417.....	54
Micro PDF417	54
QR Code	54
QR Code URL Link.....	55
Micro QR.....	55
Data Matrix	55
Aztec Code.....	56
Appendix	57
Data and Edit barcode	57
Barcode ID Type Table	59
AIM ID Table	60
Visible Character ASCII Table	61
Control Character Set (USB keyboard mode)	62
Control Character Set (RS232,USB-VCP).....	63
Configuration of Instructions and Examples	64
Example for user-defined prefix and suffix:	64
Example for barcode length range configuration	64
Example for USB keyboard transmit speed configuration	65

Version No.



Version Number


Default Setting

Scanning the below barcode can restore the scanner to default.



Restore Default Configuration

Interface Selection

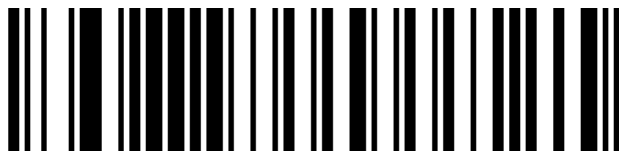

USB HID keyboard



USB Virtual COM



RS232

USB Keyboard Layout

Control Character Escaping



Enable Escape Mode 1 (Default)




Enable Escape Mode 2



Disable


CR/LF character processing(USB Keyboard)

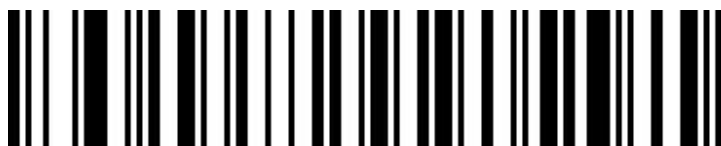

Only 0A(LF) line feed



Only 0D (CR) line feed (Default)

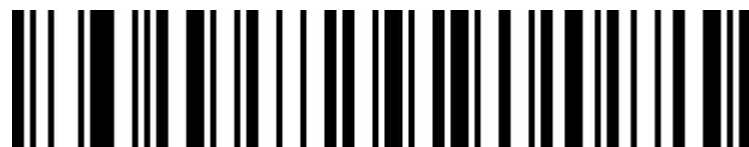


All convert to 0A(LF)/0D(CR)

USB Keyboard Transfer Speed

Used for set up scanning speed under USB keyboard mode. If PC in a lower function, please choose low scanning speed to make sure its accuracy.



Low (Default)

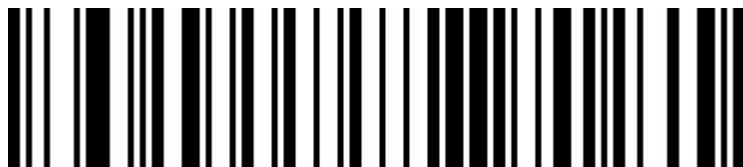

Middle



High



Custom Sending Speed (2ms~50ms)

Convert Case



Original Data (Default)



Case Inversion



All Convert to Upper Case




All Convert to Lower Case

Keyboard Layouts



English (United States)

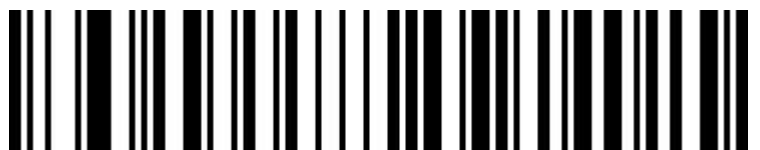

French (France)



Italian (Italy)



Italian 142 (Italy)



German (Germany)



Spanish (Spain)



Spanish (Latin America)



Finnish



Japanese



Russian (MS)



Russian (typewriter)



Arabic (101)



Irish



Polish (214)



Polish (Programmers)



Dutch (Netherlands)



Czech (QWERTZ) (Default)



Portuguese (Portugal)



Portuguese (Brazil)



Swedish (Sweden)



Turkish Q



Turkish F



Greek (MS)



French (Belgium)



English (UK)

Virtual Keyboard

Mode 1: Do not support output the characters between 0x20 to 0xFF by using the virtual keyboard, under the current keyboard layout.

The characters between 0x00~0x1F are output according to the definition of control characters (Refer to Appendix)

Model 2: Support output the characters between 0x20 to 0xFF by using the virtual keyboard. The characters between 0x00~0x1F are output according to the definition of control characters (Refer to Appendix)

Model 3: Support output the characters between 0x00~0xFF by using the virtual keyboard



Turn Off



Turn On (Mode 1) (Default)



Turn On (Mode 2)



Turn On (Mode 3)

Selection of Host Operating System in Virtual Keyboard Mode



WINDOWS (Default)



MAC OS



LINUX

Barcode Encoding Configuration

In a normal situation , the barcode encoding was identified accurately.

Please user manual to set up if encountered peculiar characters, that make sure output barcode content correctly.



Auto (Default)



GBK Code



UTF-8 Code



KOI8-R Code




Japanese Shift-JIS Code

Output Encoding Format

To output correctly in the specified encoding format.

For example: It's GBK code when output in the Notepad /Excel; It's UNICODE when output in the Word.


When output is English/Latin-1 encode format, the output mode will affected by the function switch of virtual keyboard. When output is GBK/UNICODE, the output mode will compelled to virtual keyboard.

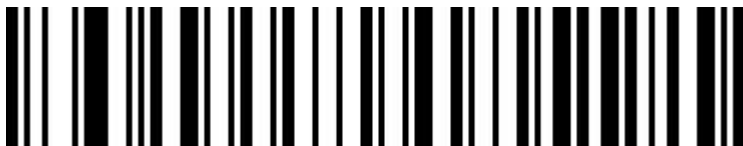

English/Latin-1 (Default)



GBK (Notepad/excel)

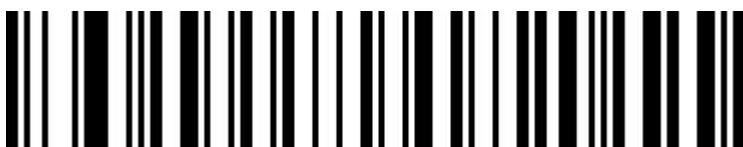

UNICODE (Word)



Japanese Shift-JIS code



UTF-8 code

Invoice Function

Switch On/Off Invoice Function



OFF (Default)



On

To ensure the correct output of the invoice content, when switch on the invoice code function, please configure the Chinese character output mode to GBK code (Notepad/Excel), and at the same time switch off like Code ID, User-defined prefix/suffix, and starting character to change original barcode content function.

Invoice Type



VAT Invoice (Special) (Default)



VAT Invoice (Normal)

RS232 Interface Configuration

Baud Rate



4800



9600 (Default)



19200



38400



57600




115200

Data bit, Stop bit, Parity bit



7 Bit, 1 Stop Bit, No Parity

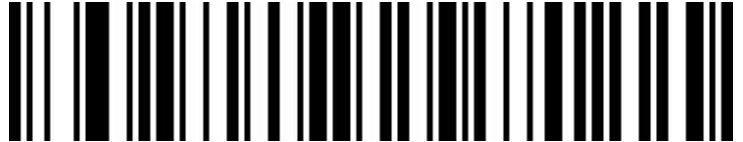

7 Bit,1 Stop Bit, Even Parity



7 Bit,1 Stop Bit, Odd Parity



7 Bit, 2 Stop Bit, No Parity



7 Bit, 2 Stop Bit, Even Parity



7 Bit,2 Stop Bit, Odd Parity



8 Bit,1 Stop Bit, No Parity(Default)



8 Bit, 1 Stop Bit, Even Parity



8 Bit, 1 Stop Bit, Odd Parity



8 Bit, 2 stop Bit, No Parity



8 Bit, 2 Stop Bit, Even Parity



8 Bit, 2 Stop Bit, Odd Parity

GS Control Character Replacement



Do Not Replace (Default)

If output character is “Ç”, please scan” Virtual keyboard (Mode 1 or Mode 2 or Mode 3)” first.



Replace Ç



Replace |



Replace ^]



Replace]



Replace <GS>

Control Character Output



Disable



Enable(Default)

Scan Mode

Auto Sense Mode off

Scanning by pressing the trigger when auto sense mode is off. It's default mode.



Off (Default)

Auto Sense Mode on

The scan engine can sense barcode for decoding automatically.



On

Repeat Barcode Detection

Using for decoding same barcode of interval time, it will decode only one time if not exceeded set time.



500ms



750ms (Default)



1s



2s

Center Mode

When center mode is turned on, the scan engine only reads the barcode located in the center area, this configuration is disabled as default.



Off(Default)



On

Light Configuration

LED Indicator Light



Off



On (Default)

Buzzer Configuration

Volume Setting




Low



High (Default)

Scanner Start Prompt Tone Setting

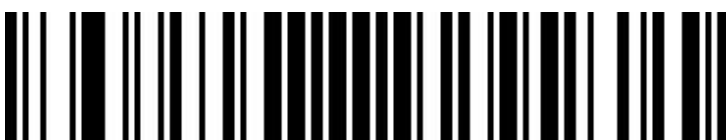

Off



On (Default)

Successful Decoding Prompt Tone Setting



Off



On (Default)

Successful Decoding Prompt Audio Frequency Setting (Tone)



1 (Default)



2



3



Successful Decoding Prompt Duration Setting



Long (Default)



Short

Error Warning Prompt Frequency Setting (Tone)

There will be four consecutive error warning tones if data transmission fails, and a single error warning tone when the unrecognized configuration code is scanned.



Low (Default)



Middle



High

Prefix and Suffix Configuration

Start Character




None (Default)



STX

Terminal Character

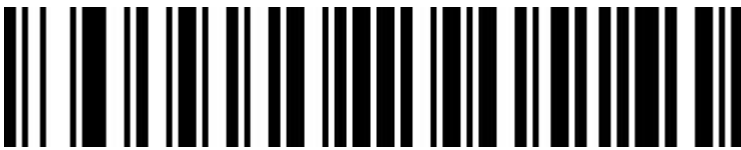

None




Enter




LF



CR/LF (Default)

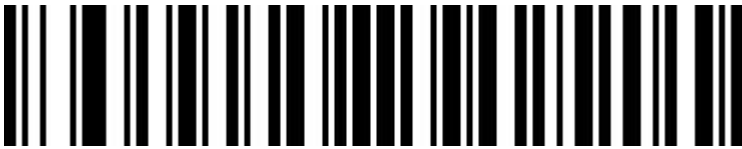

TAB

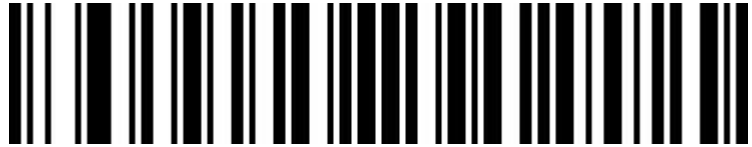

ETX

Custom Prefix

Output Options



On



Off (Default)

Edit



ClearAll Custom Prefix




Set Custom Prefix

(Please set up ID Table ,Data, and edit barcode refer to the appendix after scanning.)

Custom Suffix

Output Options

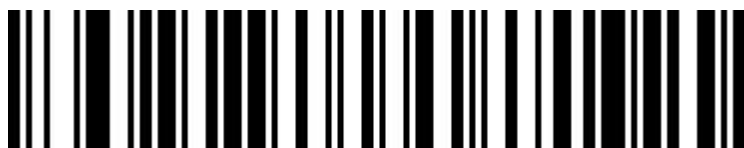

On



Off (Default)

Edit



ClearAll Custom Suffix



Set Custom Suffix

(Please set up ID Table ,Data, and edit barcode refer to the appendix after scanning.)

Code ID Output

Options



Off (Default)



Enable Code ID Before Barcode



Enable Code IDAfter Barcode

Edit



Set Custom Code ID

(Please set up ID Table ,Data, and edit barcode refer to the appendix after scanning.)



ClearAll Custom Code ID

AIM ID



Off (Default)



Enable AIM ID Before Barcode



Enable AIM IDAfter Barcode

Barcode Prefix and Suffix Order Selection

Prefix



Start Character+CODE ID+AIM ID+Custom Prefix (Default)



Start Character+ Custom Prefix + CODE ID+AIM ID

Suffix



Custom Suffix+CODE ID+AIM ID+Terminal Character (Default)



CODE ID+AIM ID+Custom Suffix+Terminal Character


Data Edition

The Data editing function can customize the barcode content into the three fields of Start/Center/End by configuring the Start/End field length.

Please configure the length of the Start/End field and the transport configuration according to the actual needs.

Note: Custom presuffix, start, end, CODE ID, AIM ID and other non-barcode content will not be affected by the data editing function.


Transmission Configuration

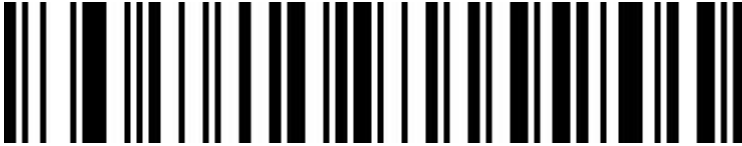

Transfer the full Data field



Only transfer the Start field

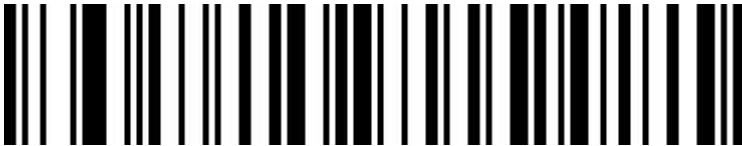

Only transfer the Center field



Only transfer the End field

Field Length Configuration



Set Start field length



Set End field length

Inverse color barcode selection

(Only 1D/DataMatrix/Aztec)



Normal Color



Inverse Color



Both (Normal/Inverse)

Non-standard Barcode Option

When non-standard barcode decoding enabled, scanner can be better compatible with some non-standard barcodes, but the probability of reading errors will increase.



Disable(Default)



Enable

Barcode Type Selection

Enable/DisableAll barcodes

Enable all barcodes will low down decoding speed. So, we suggest you switch on scanner when needed. (Default is switch on state)




Enable All




DisableAll

Enable/DisableAll 1D barcodes

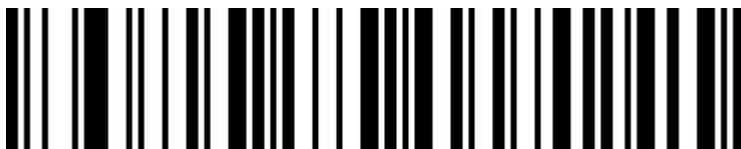


Enable All

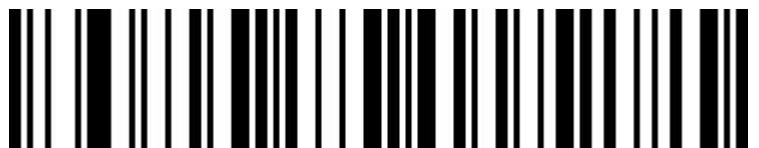

Disable All

Enable/DisableAll 2D barcodes

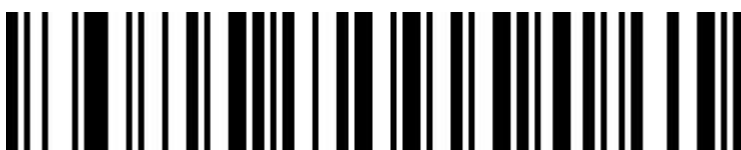

Enable All



DisableAll

Codabar



Enable



Disable

Codabar Start/Terminal Character



Don't Send Codabar Start/Terminal Character (Default)



Send Codabar Start/Terminal Character

Set Length Range for Codabar



Minimum Length (0~50bit)



Maximum Length (0~50bit)

Code 39



Enable



Disable

Code 39 Parity Check



Disable (Default)



Enable But Not Transfer



Enable & Transfer

Code 39 Full ASCII



Enable



Disable (Default)

Code 39 Start/Terminal Character



Don't Send Code 39 Start/Terminal Character(Default)



Send Code 39 Start/Terminal Character

Set Length Range for Code 39



Minimum Length (0~50bit)



Maximum (0~50bit)

Code 32(Enable code39 first)




Enable



Disable

Code 32 Prefix

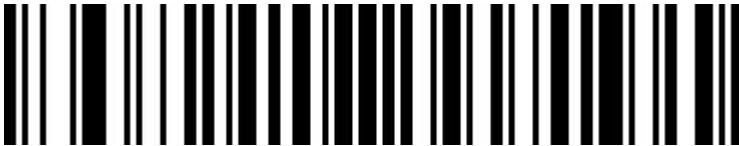

Enable



Disable(Default)

Interleaved 2 of 5 (ITF25)



Enable



Disable

Interleaved 2 of 5 (ITF25) Check Bit



Disable Check Bit (Default)



Enable Check and Don't Send Check Bit



Enable Check & Send Check Bit

Interleaved 2 of 5 (ITF25) Length Selection



Random Length (6-50bits) (Default)



6 Bits



8 Bits



10 Bits



12 Bits



14 Bits



16 Bits



18 Bits



20 Bits



22 Bits



24 Bits

Set Length Range for Interleaved 2 of 5



Minimum (0~50bits)



Maximum (0~50bits)

Industrial 2 of 5/IATA



Enable



Disable

Set Length Range for Industrial 2 of 5



Minimum (0~50bits)



Maximum (0~50bits)

Matrix 2 of 5 (4-24bit)



Enable



Disable

Set Length Range for Matrix 2 of 5



Minimum (0~50bits)



Maximum (0~50bits)

Code 93



Enable



Disable

Set Length Range for Code 93



Minimum (0~50bits)



Maximum (0~50bits)

Code 11



Enable



Disable (Default)

Code 11 Parity Check Output



Enable



Disable (Default)

Code 11 Parity Selection



Disable (Default)




1 Bits



2 Bits

Set Length Range for Code 11

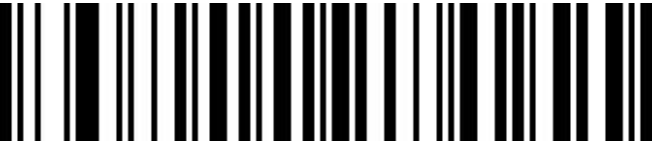

Minimum (0~50bits)



Maximum (0~50bits)

Code 128



Enable



Disable

ISBT-128



Disable



Enable

GS1-128



Enable



Disable

Set Length Range for CODE-128



Minimum (0~50bits)



Maximum (0~50bits)

UPC-A



Enable



Disable

UPC-A Check Bit



Send UPC-A Check Bit (Default)



Don't Send UPC-A Check Bit

UPC-A Leading Digits



Send UPC-A Country Code+System Digits(Convert to EAN-13)



Send UPC-A System Digits(Default)




Don't Send UPC-A System Digits

UPC-E



Enable

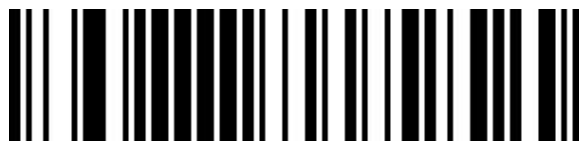

Disable

UPC-E Check Bit



Send UPC-E Check Bit (Default)



Don't send UPC-E Check bit

UPC-E Expand to UPC-A



Enable



Disable (Default)

UPC-E Leading Digits



Send UPC-E Country Code+System Digits



Send UPC-E System Digits(Default)



Don't Send UPC-E System Digits

EAN/JAN-8



Enable



Disable

EAN-8 Convert to EAN-13



Disable EAN-8 convert to EAN-13(Default)



Enable EAN-8 convert to EAN-13

EAN-8 Check Bit




Send EAN-8 Check Bit(Default)



Don't Send EAN-8 Check Bit

EAN/JAN-13

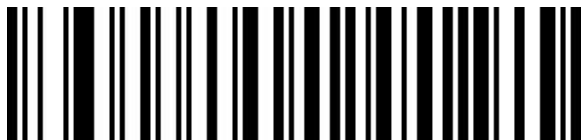

Enable



Disable

EAN-13 Check Bit



Send EAN13 Check Bit (Default)



Don't Send EAN13 Check Bit

UPC/EAN/JAN Additional Code



IgnoreAdditional Code(Default)



Decode Additional Code



Adaptive Additional Code

EAN13 Convert to ISBN



Enable



Disable (Default)

EAN13 Convert to ISSN




Enable




Disable (Default)

GS1 DataBar (RSS14)

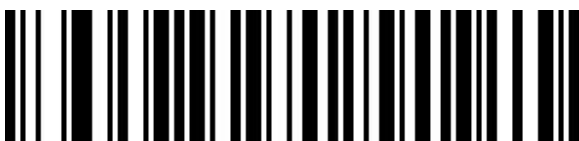

Enable

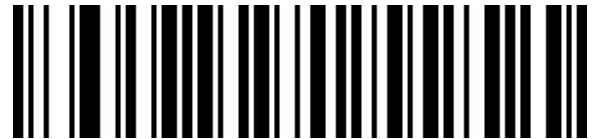

Disable

GS1 DataBar Limited



Enable



Disable

GS1 DataBar Expanded



Enable




Disable

GS1 Composite



Enable

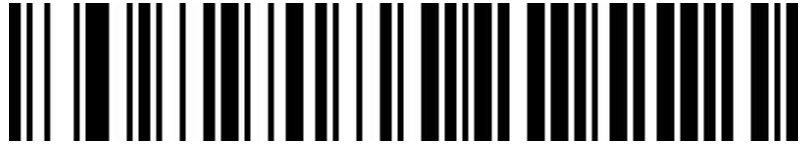

Disable(Default)

MSI



Enable



Disable(Default)

MSI Check Bit



Send MSI Check Bit



Don't Send MSI Check Bit(Default)

MSI Check Bit Option



1 Check Bit(Default)



2 Check Bits

MSI 2 Check Bits Option



MOD10/MOD10(Default)



MOD10/MOD11

MSI Code Reading Length Setting



Minimum Reading Length(0-50digits)



Maximum Reading Length(0-50digits)


Febraban

Note: Please disable AIM ID function before opening Febraban function.

Enable/Disable Febraban Code(ITF25)



Enable/Disable Febraban code(Code128)

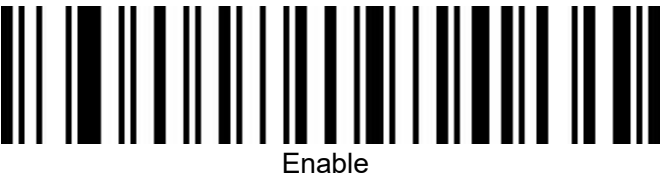

Febraban Check Bit



PDF417



Enable



Disable

Micro PDF417



Enable



Disable

QR Code



Enable



Disable

QR Code URL Link



Disable



Enable

Micro QR



Enable



Disable

Data Matrix



Enable



Disable

Aztec Code



Enable



Disable

Appendix

Data and Edit barcode





A



B



C



D



E



F



Cancel Current Setting



Cancel AString of Data from Previous Read



Cancel The Data from Previous Read



Save

Barcode ID Type Table

Code type	HEX	CODE
All codes	99	
Codabar	61	a
Code128	6A	j
Code32	3C	<
Code93	69	i
Code39	62	b
Code11	48	H
EAN-13	64	d
EAN-8	64	d
GS1 DataBar	52	R
GS1-128 (EAN-128)	6A	j
2 of 5		
Interleaved 2 of 5	65	e
Matrix 2 of 5	76	v
Industry 2 of 5/IATA	44	D
UPC-A	63	c
UPC-E	63	c
ISBN	42	B
ISSN	6E	n
MSI	6D	m
Aztec Code	7A	z
DataMatrix	75	u
PDF417	72	r
Micro PDF417	53	S
QR Code	51	Q
Micro QR Code	51	Q

AIM ID Table

Code type	AIM ID	Description
Codabar	]Fm	m : 0~1
Code128	]C0	m : 0, 1, 2, 4
Code32	]A0	
Code93	]G0	
Code39	]Am	m : 0, 1, 3, 4, 5, 7
Code11	]Hm	m : 0, 1, 3, 8, 9
EAN-13 / EAN-8	]Em	m : 0, 1, 3, 4
GS1 DataBar	]e0	
GS1-128 (EAN-128)	]C1	
Interleaved 2 of 5	]Im	m : 0, 1, 3
Matrix 2 of 5	]X0	
Industry 2 of 5	]S0	
UPC-A / UPC-E	]Em	m : 0, 3
ISBN	]X0	
ISSN	]X0	
Aztec Code	]z0	
DataMatrix	]dm	m: 0~6
PDF417 / Micro PDF417	]Lm	m: 0~5
QR Code / Micro QR Code	]Qm	m: 0~6

Visible Character ASCII Table

Decimal	Hexadecimal	Character	Decimal	Hexadecimal	Character
32	20	<SPACE>	80	50	P
33	21	!	81	51	Q
34	22	"	82	52	R
35	23	#	83	53	S
36	24	\$	84	54	T
37	25	%	85	55	U
38	26	&	86	56	V
39	27	'	87	57	W
40	28	(	88	58	X
41	29	)	89	59	Y
42	2A	*	90	5A	Z
43	2B	+	91	5B	[
44	2C	,	92	5C	\
45	2D	-	93	5D	]
46	2E	.	94	5E	^
47	2F	/	95	5F	_
48	30	0	96	60	`
49	31	1	97	61	a
50	32	2	98	62	b
51	33	3	99	63	c
52	34	4	100	64	d
53	35	5	101	65	e
54	36	6	102	66	f
55	37	7	103	67	g
56	38	8	104	68	h
57	39	9	105	69	i
58	3A	:	106	6A	j
59	3B	;	107	6B	k
60	3C	<	108	6C	l
61	3D	=	109	6D	m
62	3E	>	110	6E	n
63	3F	?	111	6F	o
64	40	@	112	70	p
65	41	A	113	71	q
66	42	B	114	72	r
67	43	C	115	73	s
68	44	D	116	74	t
69	45	E	117	75	u
70	46	F	118	76	v
71	47	G	119	77	w
72	48	H	120	78	x
73	49	I	121	79	y
74	4A	J	122	7A	z
75	4B	K	123	7B	{
76	4C	L	124	7C	
77	4D	M	125	7D	}
78	4E	N	126	7E	~
79	4F	O			

Control Character Set (USB keyboard mode)

Decimal	Hexadecimal	Corresponding Key Value (Disable CODE ID)	Corresponding Key Value (Enable CODE ID)
0	00	reserve	Ctrl+@
1	01	Insert	Ctrl+A
2	02	Home	Ctrl+B
3	03	End	Ctrl+C
4	04	Delete	Ctrl+D
5	05	Page Up	Ctrl+E
6	06	Page Down	Ctrl+F
7	07	ESC	Ctrl+G
8	08	Backspace	Ctrl+H
9	09	Tab	Ctrl+I
10	0A	Enter (The configuration of CRLF processing decide how it express)	Ctrl+J
11	0B	Caps Lock	Ctrl+K
12	0C	Print Screen	Ctrl+L
13	0D	Enter (The configuration of CRLF processing decide how it express)	Ctrl+M
14	0E	Scroll Lock	Ctrl+N
15	0F	Pause/Break	Ctrl+O
16	10	F11	Ctrl+P
17	11	Direction key ↑	Ctrl+Q
18	12	Direction key ↓	Ctrl+R
19	13	Direction key ←	Ctrl+S
20	14	Direction key →	Ctrl+T
21	15	F12	Ctrl+U
22	16	F1	Ctrl+V
23	17	F2	Ctrl+W
24	18	F3	Ctrl+X
25	19	F4	Ctrl+Y
26	1A	F5	Ctrl+Z
27	1B	F6	Ctrl+[
28	1C	F7	Ctrl+\
29	1D	F8	Ctrl+]
30	1E	F9	Ctrl+^
31	1F	F10	Ctrl+_

Control Character Set (RS232,USB-VCP)

Decimal	Hexadecimal	Character
0	00	NUL
1	01	SOH
2	02	STX
3	03	ETX
4	04	EOT
5	05	ENQ
6	06	ACK
7	07	BEL
8	08	BS
9	09	HT
10	0A	LF
11	0B	VT
12	0C	FF
13	0D	CR
14	0E	SO
15	0F	SI
16	10	DLE
17	11	DC1
18	12	DC2
19	13	DC3
20	14	DC4
21	15	NAK
22	16	SYN
23	17	ETB
24	18	CAN
25	19	EM
26	1A	SUB
27	1B	ESC
28	1C	FS
29	1D	GS
30	1E	RS
31	1F	US

Configuration of Instructions and Examples

Example for user-defined prefix and suffix:

You can edit 10 characters as prefix or suffix. (In order to make sure the prefix and suffix can output normally, please enable user-defined prefix or suffix first)

Example 1.1:

Set "XYZ" as prefix on all codes

Before set up , please search HEX value for all codes is "99" (Appendix: barcode type ID Table); find "X""Y""Z" HEX value is "58""59""5A" (Appendix:Visible CharacterASCII Table)

Step: Set "User-defined Prefix"; Set " 9""9""5""8""5""9""5""A" (Appendix: data and edit barcode); Set"Save".

If you want to revise the scanned barcode before save, please set up "Cancel the data from previous read" or"Cancel a string of data from previous read" to reset. If you want to give up setting scan , then scan" Cancel current setting".

Example 1.2:

Set "R" as prefix on QR

Before set up, please search HEX value for QR code is "51"(Appendix: barcode type ID Table); find"R" HEX value is "52" (Appendix:Visible Character ASCII Table)

Step: Set " Custom prefix"; Set"5""1""5""2" (Appendix: data and edit barcode); Set"

Save". **Example 1.3:**

Cancel Custom prefix in QR code

Step: Set" Custom prefix"; Set"5""1"; Set" Save"

Note: If set up prefix on all QR codes, it will default all QR codes prefix after set up.

In contrast, if cancel all prefix / suffix on barcodes, please set " Clear All Custom Prefix" and "Clear All Custom Suffix".

Example for barcode length range configuration

Please sure it not bigger than current maximum length range when set up minimum length. Otherwise, it will show error. In the same way, must be make sure it's not smaller than current minimum length range when set up maximum length.

Example 2.1:

Set Code 128 length range is 4-12bit

Step: Set "Code 128 Minimum (0~50bit) "; Set"4"; Set "Save" Set "Code 128 Maximum (0+50bit)"; Set"1"2"; Set "Save"

Example 2.2:

Set Interleaved 2 of 5 length is 14bit

It can set up by "ITF25 14bit", through barcode length range of Maximum /Minimum to set,too.

Step: Set" Interleave 2 of 5 Minimum (0~50bit) "; Set"1"4"; Set"Save" Set" Interleave 2 of 5 Maximum (0+50bit)"; Set"1"4"; Set"Save"

Example 2.3:

Set Code 39 length is random length

Step: Set" Code 39 Minimum (0~50bit) "; Set"0" ; Set"Save" Set"Code 39 Maximum (0+50bit)"; Set"0"; Set "Save"

Example for USB keyboard transmit speed configuration

If PC in a lower function, it will appear error status. Need to set up a slow scanning speed with customized under USB keyboard mode. Such as: 50ms

Step: Set"Custom Sending Speed"; Set"5"0";Set"Save"

Warning Tone

It will appear error warning for 4 times in a continue while transfer failure barcode. Please check if it's normal work when appear this situation.

Read Skills

To get a good reading performance, a beam of aim light from scanner should be aimed at the centre of barcode, support to aim in any directions for read convenient,too.

More nearly barcode, the beam of aim light is smaller; More further barcode, the beam of aim light bigger. For reading barcode correctly, if barcode is small, the scanner should be close to barcode, if barcode is big, the scanner should be farther to barcode.

If the barcode is highly reflective (for example: coated surface), please adjust the scanner angle to read it successfully.



Safety

Please not direct aim eye when the scanner has a strong ray of light, to avoid causing any hurt or unwell.